



**F60 CN15W-
PS90 SCR FS**



**TOOL-
FEATURES**

- High power 15° coil nailer for nails and SCRAIL® up to 90 mm (3 1/2")
- Fully pneumatic feeding and positioning system
- No-Mar tip avoids marking of soft wood

**SCRAIL®
SUBLOC® PRO**

- Aggressive double threads for squeakless subfloors
- Vastly improved holding power vs. ring shank nails
- Material: standard steel, SS304/A2 stainless steel
- Finish: electro-galvanized, FASCOAT®



CONTACT & SERVICE

Our sales team
is happy available at:

P +43 7724 2111-671
sales.int@beck-fastening.com
www.beck-fastening.com


**SCRAIL®
SUBLOC® PRO
WITHDRAWAL VALUES:**

*Detailed Plywood, OSB and 'AdvanTech performance data available on request.


'AdvanTech' is a trademark of its respective owner.



Southern Yellow Pine

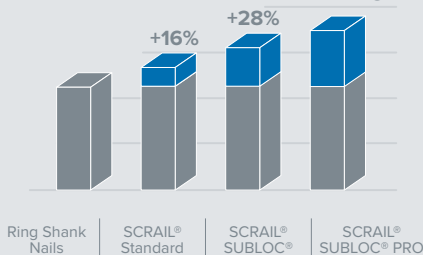

Head Pull Through Values*



RAIMUND BECK NAGELTECHNIK GmbH
Raimund-Beck-Straße 1 | 5270 Mauerkirchen
P +43 7724 2111-0
sales.int@beck-fastening.com
www.beck-fastening.com

Follow us



F60 CN15W-PS90 SCR FS

APPLICATIONS

- Subflooring - SUBLOC® PRO
- Roof joists, rafters and joists
- Fencing
- Boxes, crates and pallets
- Decking and Siding
- Trusses
- Cable reels

HANDLING

1. Load fastener into the magazine
2. Connect air supply
3. Avoid a dry and dirty tool by cleaning and lubricating regularly

TOOL CHARACTERISTICS

| Height | Width |
|------------|-----------|
| 387 mm | 142 mm |
| 15.24 inch | 5.60 inch |
| Length | Weight |
| 369 mm | 3,95 kg |
| 14.53 inch | 8.70 lbs |

Pressure

5 - 8 bar | 70 - 120 psi

Air consumption per shot

2.63 L. | 0.093 SCF

Performance at 90 psi | 6.2 bar (0.62 MPa)

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 101.30 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 91.20 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

4.50 m/s²

ACTUATION & LOADING

Actuation System:

Full sequential actuation

Loading: Coil

VARIATIONS

- F33 CN15W-PS50 SCR
- F44AC CN15W-PS65 SCR
- F50 CN15W-PS65 SCR

FASTENER DATA NAILS

| | |
|------------------------|---|
| Inner & Outer diameter | 2,5 - 3,8 mm 0.099 - 0.150" |
| Shank | smooth ring screw knurled |
| Pitch | 8 mm 0.315" |
| Head | 5,5 - 7,1 mm 0.216 - 0.279" |
| Length | 45 - 90 mm 1 ¾ - 3 ½" |
| Capacity | 200 - 300 |
| Nail Type | 15° Wire Coil Nails, 15° Plastic Sheet Coil Nails |

FASTENER DATA SCRAIL®

| | Fine Coarse STEEL THREAD CHIPBOARD | SUBLOC® PRO |
|------------------------|---|-------------------------------|
| Inner & Outer diameter | 2,8 - 3,9 mm 0.113 - 0.150" | 2,8 - 3,2 mm 0.113 - 0.126" |
| Drive Type | phillips® square pozi (pozidrive®) torx®/star versa | torx® |
| Length | 45 - 90 mm 1 ¾" - 3 ½" | 45 - 75 mm 1 ¾" - 3" |
| Capacity | 200 - 300 | |
| Nail Type | 15° Wire Coil SCRAIL®, 15° Plastic Sheet Coil SCRAIL® | 15° Wire Coil SCRAIL® |

Changes and errors excepted. All rights reserved.

FASCO®, SCRAIL®, SUBLOC® and FasCoat® are registered trademarks of the RAIMUND BECK KG.

Torx®, Phillips®, Pozi (Pozidrive®) are all trademarks of their respective owners.

VERSION
11/2024 EN