



**F60 CN15W-
PS90 SCR FS**



TOOL- FEATURES

- High power 15° coil nailer for nails and SCRAIL® up to 90 mm (3 1/2")
- Fully pneumatic feeding and positioning system
- No-Mar tip avoids marking of soft wood

SCRAIL® SUBLOC® PRO

- Aggressive double threads for squeakless subfloors
- Vastly improved holding power vs. ring shank nails
- Material: standard steel, SS304/ A2 stainless steel
- Finish: electro-galvanized, FASCOAT®



CONTACT & SERVICE

Our sales team
is happy assist you:

P +1 800 239 8665
sales.us@beck-fastening.com
www.beck-fastening.com


SCRAIL® SUBLOC® PRO WITHDRAWAL VALUES:

*Detailed Plywood, OSB and 'AdvanTech performance data available on request.


'AdvanTech' is a trademark of its respective owner.



Southern Yellow Pine

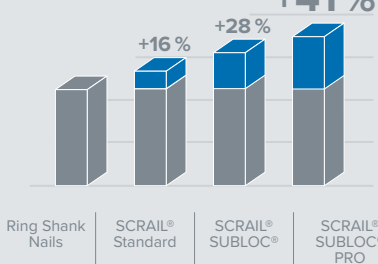

Head Pull Through Values*



BECK AMERICA

105 Industrial Park Drive
35661 Muscle Shoals, Alabama | USA
P +1 800 239 8665 | F +1 256 381 6659
sales.us@beck-fastening.com | www.beck-fastening.com

Follow us



F60 CN15W-PS90 SCR FS

APPLICATIONS

- Subflooring - SUBLOC® PRO
- Roof joists, rafters and joists
- Fencing
- Framing
- Boxes, crates and pallets
- Decking and Siding
- Trusses
- Cable reels

HANDLING

1. Load fastener into the magazine
2. Connect air supply
3. Avoid a dry and dirty tool by cleaning and lubricating daily

TOOL CHARACTERISTICS

Height	Width
387 mm	142 mm
15.24 inch	5.60 inch
Length	Weight
369 mm	3,95 kg
14.53 inch	8.70 lbs

Pressure

5 - 8 bar | 70 - 120 psi

Air consumption per shot

2.63 L. | 0.093 SCF

Performance at 90 psi | 6.2 bar (0.62 MPa)

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 101.30 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 91.20 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

4.50 m/s²

ACTUATION & LOADING

Actuation System:

Full sequential actuation*

* find a selectable bump fire trigger in the box

Loading: Coil

VARIATIONS

- F33 CN15W-PS50 SCR
- F44AC CN15W-PS65 SCR
- F50 CN15W-PS65 SCR

FASTENER DATA NAILS

Inner & Outer diameter	2,5 - 3,8 mm 0.099 - 0.150"
Shank	smooth ring screw knurled
Pitch	8 mm 0.315"
Head	5,5 - 7,1 mm 0.216 - 0.279"
Length	45 - 90 mm 1 ¾ - 3 ½"
Capacity	200 - 300
Nail Type	15° Wire Coil Nails, 15° Plastic Sheet Coil Nails

FASTENER DATA SCRAIL®

	Fine Coarse CHIPBOARD	SUBLOC® PRO
Inner & Outer diameter	2,8 - 3,9 mm 0.113 - 0.150"	2,8 - 3,2 mm 0.113 - 0.126"
Drive Type	phillips® square pozi (pozidrive®) torx®/star versa	torx®
Length	45 - 90 mm 1 ¾" - 3 ½"	57 - 75 mm 2 ¼" - 3"
Capacity	200 - 300	
Nail Type	15° Wire Coil SCRAIL®, 15° Plastic Sheet Coil SCRAIL®, 15° Plastic Coil SCRAIL®	15° Wire Coil SCRAIL®

Changes and errors excepted. All rights reserved.

FASCO®, SCRAIL®, SUBLOC® and FasCoat® are registered trademarks of the RAIMUND BECK KG.

Torx®, Phillips®, Pozi (Pozidrive®) are all trademarks of their respective owners.

VERSION
10/2024 US