



**SCRAIL®  
SUBLOC® PRO**



**SCRAIL®  
SUBLOC® PRO**

- Aggressive double threads for squeakless subfloors
- Vastly improved holding power vs. ring shank nails
- Material: standard steel, SS304/A2 stainless steel
- Finish: electro-galvanized, FasCoat®

**DIAMOND  
COATING**

The expansion elements in the DIAMOND COATING diminish the friction between the fastener & the wood material. As a result of this reduced friction the fastener destroys less wood fibers, allowing more contact surface which results in increased withdrawal values.



**CONTACT & SERVICE**


Our sales team is available at:

P +43 7724 2111-671  
sales@beck-fastening.com  
www.beck-fastening.com


**SCRAIL®  
SUBLOC® PRO  
WITHDRAWAL VALUES:**



Southern Yellow Pine

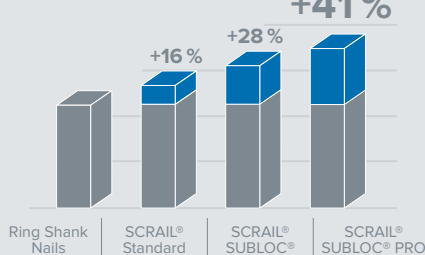

Head Pull Through Values\*

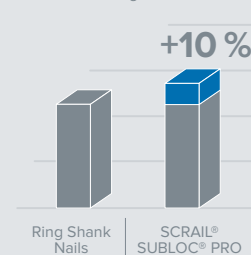

\*Detailed Plywood, OSB and 1AdvanTech performance data available on request.  
1AdvanTech® is a trademark of its respective owner.



## APPLICATIONS

Subflooring - SUBLOC® PRO



## FASTENER DATA SCRAIL®

	Fine   Coarse   Steel Thread	SUBLOC® PRO
<b>Inner &amp; Outer diameter</b>	2,8 - 3,8 mm   0.113 - 0.150"	2,8 - 3,2 mm   0.113 - 0.126"
<b>Drive Type</b>	phillips®   square   pozi (pozidrive®)   torx®/star   versa	square   torx®
<b>Length</b>	50 - 90 mm   2 - 3 ½"	57 mm   2 ¼"
<b>Capacity</b>	200 - 300	
<b>Collation Type</b>	0° Plastic Sheet Coil SCRAIL®   17°, 20°, 33° Plastic Strip SCRAIL®   15° Wire Coil SCRAIL®   15° Plastic Sheet Coil SCRAIL®	0° Plastic Sheet Coil SCRAIL®   17°, 20°, 33° Plastic Strip SCRAIL®   15° Wire Coil SCRAIL®

## COMPATIBLE FASCO® TOOLS

- F60A CN15W-PS90 SCR
- F58A RHN20-90C SCR
- F58AC RHN20-90C SCR
- F58A CHN33-90B SCR
- F58AC CHN33-90B SCR
- F58A CN15W-70 SLP
- F58AC CN15W-80 SLP
- F70G RHN20-90 SCR

