



TOOL FEATURES

- Light weight and powerful tool
- Lock-out, to prevent dry firing
- Removable no-mar tip and extra rubber tip stored

PINS AND BRADS

- For B82 pins and MB brads with 0.80 mm wire diameter (21 Gauge)
- Up to 50 mm length
- Galvanized



CONTACT & SERVICE

Our sales team
is available at:

P +1 800 239 8665
sales@beck-america.com
www.beck-america.com

DESCRIPTION

- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- No-mar tip avoids marking of soft wood
- Slim nose ensures good visibility and precision

F23AC MB50

APPLICATIONS

- Doors and windows
- Panels and profile boards
- Mouldings and decorative trims
- Arts and crafts
- Upholstery
- Stairs and hand rails

HANDLING

1. Load pins or brads from the side into the magazine
2. Connect air supply
3. Avoid a dry or dirty tool by lubricating respectively cleaning regularly

TOOL CHARACTERISTICS F23AC MB50

Height	Width
230 mm	65 mm
9.05 inch	2.56 inch
Length	Weight
260 mm	1,53 kg
10.24 inch	3.37 lbs

Pressure

5 - 7 bar | 70 - 100 psi

Air consumption per shot

0.50 L. | 0.018 SCF
Performance at 90 psi | 6.2 bar
(0.62 MPa)

FASTENER DATA PINS

Diameter	0.80 x 0.85 mm 0.031 x 0.033"
Length	12 15 20 22 25 28 30 32 35 38 40 45 50 mm 1/2 5/8 3/4 7/8 1 1 1/8 1 3/16 1 1/4 1 3/8 1 1/2 1 9/16 1 3/4 2"
Magazine Capacity	150 pins
Pins Type	B82 PINS (21 GAUGE)

FASTENER DATA BRADS

Diameter	0.70 x 0.90 mm 0.027 x 0.035"
Head	1.50 mm 0.059"
Length	12 15 20 22 25 28 30 32 35 38 40 45 50 mm 1/2 5/8 3/4 7/8 1 1 1/8 1 3/16 1 1/4 1 3/8 1 1/2 1 9/16 1 3/4 2"
Capacity	150 brads
Brads Type	MB BRADS (21 GAUGE)

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 87.00 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 74.00 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE


(UNI ISO/TS 8662-11)

is below the declaration limit set by UNI EN ISO 12100-1/2

ACTUATION & LOADING

Actuation System: Single Shot

Loading: Side Loading

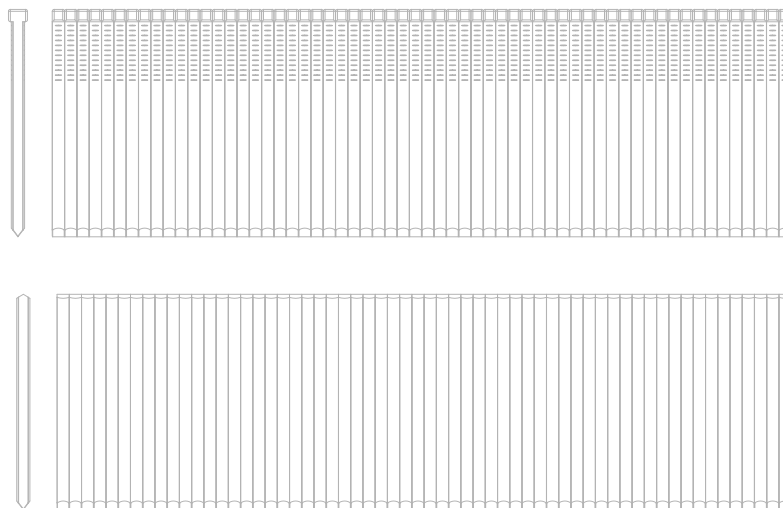

Changes and errors excepted. All rights reserved.

FASCO® is a registered trademark of the RAIMUND BECK KG.

BEA®, DUO-FAST®, HAUBOLD® and SENCO® are all trademarks of their respective owner.

VERSION
01/2021 US